

We build a better future



■ Photo may include optional equipment

HYUNDAI DIESEL FORKLIFT TRUCKS - Stage IIIB emissionised engine

110/130/160D-7A




■ Photo may include optional equipment

NEW Diesel Engine Forklift Trucks

Your satisfaction is our Priority

110/130/160D-7A

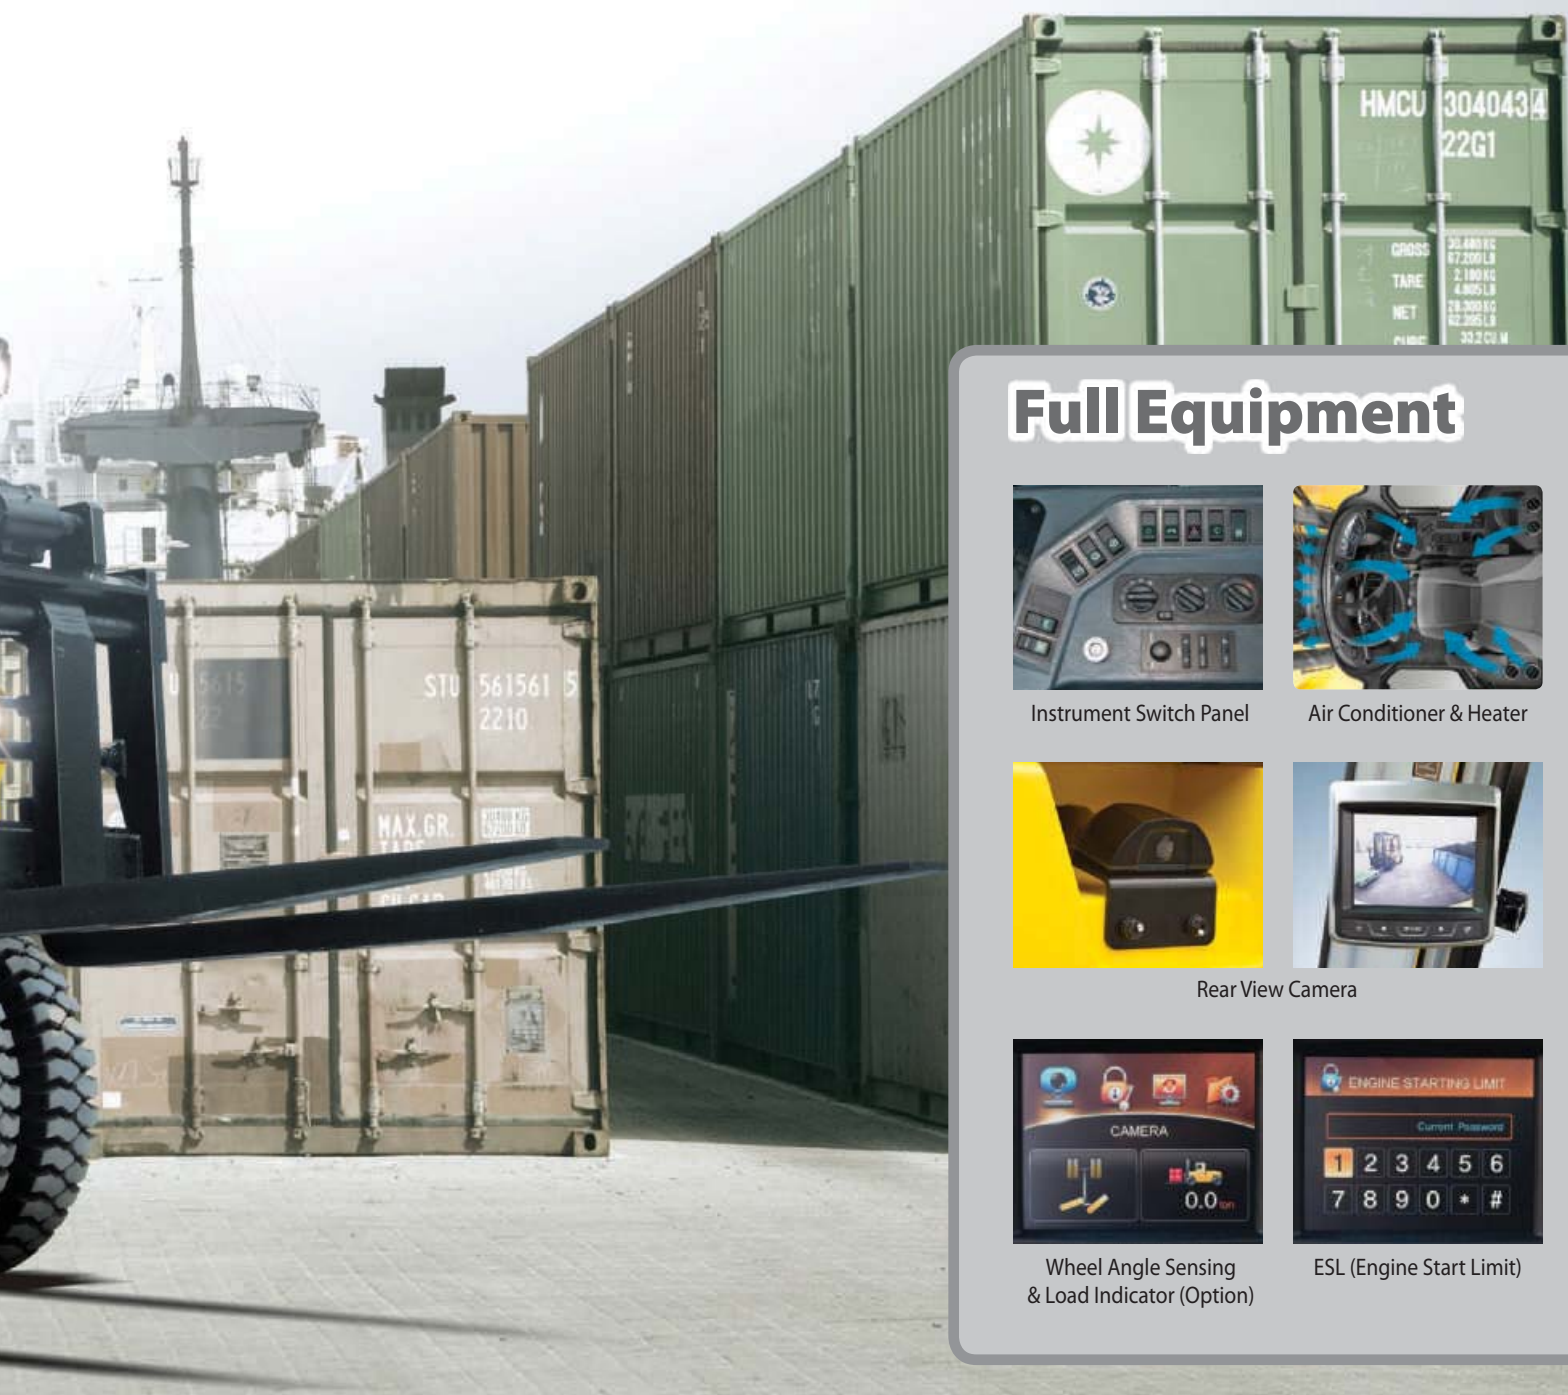

Full Equipment



Instrument Switch Panel



Air Conditioner & Heater



Rear View Camera



Wheel Angle Sensing
& Load Indicator (Option)



ESL (Engine Start Limit)

The new Job site master

The efficient and ergonomically designed 110D-7A/130D-7A/160D-7A are made to fit your needs.

Powerful Engine

Cummins QSB6.7 Engine

The six cylinders turbo-charged engine is built for power, reliability and economy. This engine meets EPA Tier 4 and EU stage IIIB emission regulation.

Variable Geometry Turbo

Unique sliding nozzle design controls EGR flow and boosts response at all engine speeds.

New CM2250 (ECU)

3 x faster processing power
2 x increased memory capability
Increases HPCR capability and provides a seamless interface to equipment systems.

Clean Crankcase Filter

Removes crankcase emissions and eliminates oil drips or mist for ultra-clean engine operation.

High Efficiency Combustion

Removes high value of PM at source – less for catalyst to remove. Incorporates a proven cooled EGR system enabling up to 5% improved fuel efficiency.



123 KW / 2200 rpm
74.6 kgf.m / 1500 rpm



Engine control mode

Depending on the required power the driver has the choice between :

Standard mode: Optimised fuel consumption when working in a light or medium application;

Power mode: In a heavy application extra power is available.



Adjustable engine idling RPM

With the engine running the driver can change the idle RPM in steps of 25 RPM.



Electronic Full-automatic Transmission

The high quality ZF transmission has proven its durability and ease of use together with soft and smooth gear changes.

Self Diagnosis Function Error indication on display




Transmission control switch

The operator has the choice between shifting manually or in the automatic modes choose between a two or a three step transmission.



Full lighting

In order to provide the driver visibility in all circumstances work lamps are standard both to the front and to the back.



Increased mast tilting angle

Maximum mast tilting angles of maximum 15° forward and 12° backwards are possible.





**High Power
Low Noise**

■ Photo may include optional equipment



Faster travel speed & better gradability

The powerfull engine combines fast acceleration with high travel speed and excellent gradability.

Gradability (Loaded)

110D-7A : 38.2 % (20.9°)
130D-7A : 34.6 % (19.1°)
160D-7A : 33.7 % (18.6°)

Travel speed (Unloaded)

110D-7A : 34.7 km/h
130D-7A : 34.5 km/h
160D-7A : 29.1 km/h

Comfortable operation!

A design based on human engineering relieves fatigue and increases operator's efficiency.



Wide visibility with Round Front Glass

Operator friendly gauges and water-resistant monitor panel



High-capacity air conditioner & heater

An integrated air conditioner and heater saves space inside the cabin. With its high capacity, the operator is, both in summer and winter, able to create a pleasant operating environment.



Heated air suspended seat with head rest (Option)

A seat designed to work a full shift in all comfort and with maximum ergonomics.



Rear view camera

The rear view camera makes the operation more easy and convenient. And it supports 4 camera channels.



Wheel Angle Sensing (Option)

Real-time steering wheel angle is displayed on the monitor.



Load Indicator (Option)

The weight of the load is displayed on the screen. The driver is alerted when he is overloading the machine.



Centralized Instrument switch Panel



USB MP3 Player & Remote Control



■ Photo may include optional equipment



Hands free Bluetooth system



Quick response of hydraulic levers

Only minimal operator's effort is required for precise, safe and productive control.
(4-Levers : standard)



Ergonomical positioned pedals

Based on human engineering, the accelerator, brake and inching pedals are optimally positioned.



Adjustable steering column

Safety through high durability!

Safety and durability are priorities in design of our equipment.



Efficient cooling system

A hydraulic fan motor ensures that the fan speed is always optimised depending on the temperatures of the intake air, transmission oil, hydraulic oil and engine coolant. This reduces both noise production and energy consumption.



OPSS

(Operator Presence Sensing System)

When the driver is not in the seat, no driving or mast movement is possible.



Kessler drive axle

The Kessler drive axle delivers the desired torque to the wheels and ensures smooth driving.



Auto parking

The parking brake will automatically be engaged when the driver leaves the machine with the transmission in neutral.



Wet disc brake system

Wet disc brakes improve the brake performance and make your service intervals longer. Enclosed brakes are protected against dust and water.



Protector for hub bolts

By applying protector for preventing bolts breakage durability has been improved. (Same size of front and rear wheels)



Cylinder guard

This guard helps to prevent possible damage on the cylinder rod from any foreign material.



Grease fittings

Grease fittings are installed for easy access to steering axle center pin when doing service checks.



■ Photo may include optional equipment



Durable mast & carriage side rollers

The durability of mast and carriage is increased with the use of side rollers.



Reliable fork carriage

High tensile structural steel is used to strengthen the fork carriage. To insure safety the width of the fork carriage is smaller than the overall width of the machine.



Large footboard & handle

Wide "open" step offers convenience and safety when entering and exiting your truck.

Centralized design for easy service!

An ideal arrangement of components ensures easy access for service and maintenance.



Large engine hood

Highly accessible engine compartment assures fast and efficient maintenance.




Cabin Tilting automatic system

Cabin tilting electronic system makes servicing of all power train components quick and easy. An electrically assisted hydraulic actuated cylinder tilts operator cabin to left side about 65 degrees for easy access to inside of truck components.



Easy change of air cleaner

This air filter is readily accessible for cleaning or replacement.



Cabin air fresh filter

The pressure inside the cabin is slightly higher than outside. This excludes dust from the cabin and reduces noise levels.



Compact fuse box for easy inspection



Mechanic Friendly Fuel Filter Replacement

Highly accessible engine compartment allows for quick replacement of filters.



Electrically monitored air filter

To avoid any damage, a sensor alerts the driver when the air filter is clogged.



Automatic locking gas spring

Engine compartment hood is safely kept open by a self locking gas spring.



■ Photo may include optional equipment




Master switch

The master switch will protect the battery from electrical drainage.



Large tool box



Pressure gauge port



Easy engine oil check


Mast specifications

Mast Type		Maximum Fork Height (mm)	Overall Height (Lowered) (mm)	Free Lift Height (mm)	Tilt Angle Forward / Backward (deg)	Load Capacity (600 mm LC) (kg)		Truck Weight (Unloaded) (kg)	
		110D/130D-7A				110D-7A	130D-7A	110D-7A	130D-7A
2- Stage Limited free lift	V280	2,900	2,805	0	15 / 12	11,000	13,000	15,595	16,350
	* V300	3,000	3,005	0	15 / 12	11,000	13,000	15,628	16,383
	V330	3,150	3,305	0	15 / 12	11,000	13,000	15,704	16,459
	V350	3,250	3,505	0	15 / 12	11,000	13,000	15,754	16,509
	V400	3,550	4,005	0	15 / 12	11,000	13,000	16,006	16,761
	V450	3,800	4,505	0	15 / 12	11,000	12,600	16,131	16,886
	V500	4,100	5,005	0	15 / 12	11,000	12,200	16,281	17,036
	V550	4,350	5,505	0	15 / 12	11,000	11,800	16,511	17,266
	V600	4,650	6,005	0	15 / 12	10,600	11,400	16,663	17,418
	V650	4,900	6,505	0	15 / 12	10,300	11,100	16,796	17,551
3 - Stage full free lift	V700	5,150	7,005	0	15 / 12	10,000	10,800	16,927	17,682
	TF440	2,950	4,405	1,595	10 / 10	11,000	12,300	16,682	17,449
	TF470	3,050	4,750	1,695	10 / 10	11,000	12,100	16,752	17,519
	TF500	3,150	5,005	1,795	10 / 10	11,000	11,800	16,823	17,590
	TF550	3,317	5,505	1,962	10 / 10	10,600	11,500	16,991	17,758
	TF600	3,484	6,005	2,129	10 / 10	10,300	11,100	17,109	17,876
	TF650	3,651	6,505	2,296	10 / 10	10,000	10,800	17,323	18,090
	TF700	3,818	7,005	2,463	10 / 10	9,700	10,500	17,442	18,209


Mast Type		Maximum Fork Height (mm)	Overall Height (Lowered) (mm)	Free Lift Height (mm)	Tilt Angle Forward / Backward (deg)	Load Capacity (600 mm LC) (kg)	Truck Weight (Unloaded) (kg)
		160D-7A				160D-7A	160D-7A
2- Stage Limited free lift	V280	2,950	2,950	0	15 / 12	16,000	19,173
	* V300	3,250	3,010	0	15 / 12	16,000	19,337
	V330	3,400	3,310	0	15 / 12	16,000	19,431
	V350	3,500	3,510	0	15 / 12	16,000	19,476
	V400	3,750	4,010	0	15 / 12	16,000	19,764
	V450	4,000	4,510	0	15 / 12	15,900	19,918
	V500	4,300	5,010	0	15 / 12	15,900	20,100
	V550	4,550	5,510	0	15 / 12	15,200	20,369
	V600	4,850	6,010	0	15 / 12	14,600	20,551
	V650	5,125	6,510	0	15 / 12	14,200	20,717
2 - Stage full free lift	V700	5,375	7,010	0	15 / 12	13,800	20,868
	VS300	3,200	3,010	1,550	10 / 10	16,000	19,323
	VS330	3,350	3,310	1,700	10 / 10	16,000	19,416
	VS350	3,450	3,510	1,800	10 / 10	16,000	19,479
	VS400	3,700	4,010	2,050	10 / 10	16,000	19,637
	VS450	3,950	4,510	2,300	10 / 10	15,800	19,887
	VS500	4,250	5,010	2,550	10 / 10	15,400	20,119
3 - Stage full free lift	VS550	4,500	5,510	2,800	10 / 10	15,100	20,307
	VS600	4,800	6,010	3,050	10 / 10	14,600	20,600
	TF395	2,950	3,964	1,600	10 / 10	15,600	20,450
	TF450	3,130	4,504	1,790	10 / 10	15,300	20,611
	TF500	3,279	5,004	1,957	10 / 10	14,900	20,786
	TF550	3,464	5,504	2,124	10 / 10	14,500	20,969
	TF600	3,631	6,004	2,291	10 / 10	14,100	21,125
	TF650	3,798	6,504	2,458	10 / 10	13,700	21,403
	TF700	3,965	7,004	2,625	10 / 10	13,400	21,546

Load Capacity


110D-7A





130D-7A



160D-7A



Dimensions

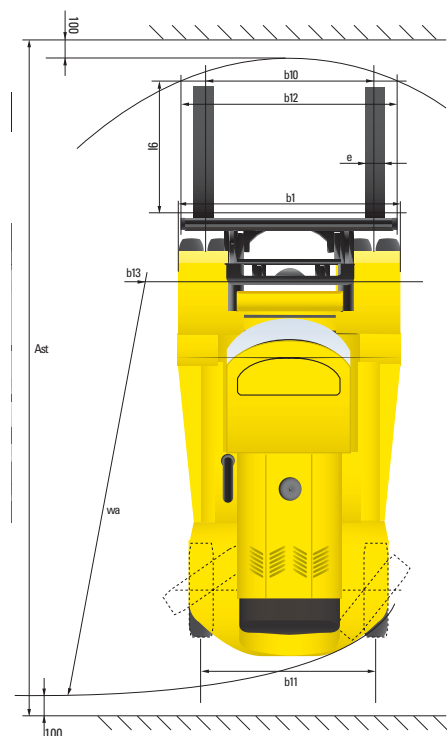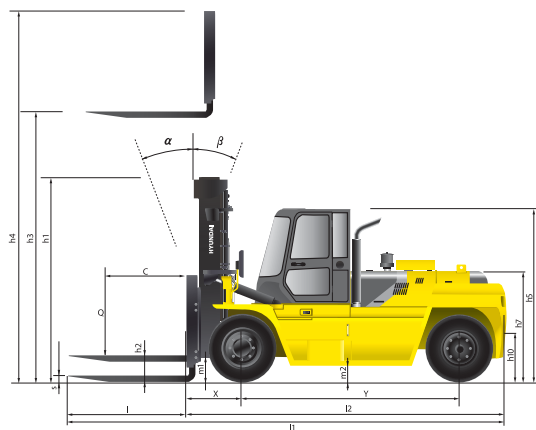

Specifications

Identification				
1.1	Manufacturer	Hyundai		
1.2	Type	110D-7A	130D-7A	160D-7A
1.3	Drive: Electric, Diesel, LPG Gas	DIESEL	DIESEL	DIESEL
1.4	Type of operation: hand, pedestrian, standing, seated, order-picker	seated	seated	seated
1.5	Load capacity (standard)	Q (t)	11.0	13.0
1.6	Load center distance	c (mm)	600	600
1.8	Load distance, center of drive axle to forks	x (mm)	760	770
1.9	Wheelbase	y (mm)	2,900	3,300
Weights				
2.1	Service weight	kg	15,628	16,383
2.2	Axle loading, loaded front / rear	kg	23,711 / 2,917	26,845 / 2,538
2.3	Axle loading, unloaded front / rear	kg	7,552 / 8,076	7,703 / 8,680
Wheels, chassis				
3.1	Tires : solid rubber (V), superelastic (SE), pneumatic (P), polyurethane (PE)	Pneumatic	Pneumatic	Pneumatic
3.2	Tires size, front (Ø x width)	10.00 - 20	10.00 - 20	12.00 - 20
3.3	Tires size, rear (Ø x width)	10.00 - 20	10.00 - 20	12.00 - 20
3.5	Wheels, number front rear (x = driven wheels)	4 x 2	4 x 2	4 x 2
3.6	Track width, front	b10 (mm)	1,842	1,842
3.7	Track width, rear	b11 (mm)	1,910	1,910
Basic dimensions				
4.1	Mast / fork carriage tilt forward / backward	degrees	15 / 12	15 / 12
4.2	Lowered mast height (standard)	h1 (mm)	3,000	3,000
4.3	Free lift	h2 (mm)	0	0
4.4	Lift height (standard)	h3 (mm)	3,000	3,000
4.5	Extended mast height (standard)	h4 (mm)	4,465	4,465
4.7	Overhead load guard (cab) height	h5 (mm)	2,900	2,935
4.8	Seat height / standing height	h7 (mm)	1,723 / 1,884	1,723 / 1,884
4.12	Coupling height	h10 (mm)	600	600
4.19	Overall length	l1 (mm)	5,690	5,695
4.20	Length to face of forks	l2 (mm)	4,340	4,345
4.21	Overall width	b1 (mm)	2,450	2,450
4.22	Fork dimensions (hook type) LxWxT	s / e / l (mm)	75 x 200 x 1,350	85 x 200 x 1,350
4.23	Fork carriage ISO 2328, class / type A,B	Pin Mount	Pin Mount	Pin Mount
4.24	Fork carriage width	b3 (mm)	2,362	2,362
4.31	Ground clearance, loaded, under mast	m1 (mm)	270	270
4.32	Ground clearance, centre of wheelbase	m2 (mm)	330	330
4.33	Aisle width for pallets 1000 x 1200 crossways (L x W)	Ast (mm)	6,465	6,470
4.34	Aisle width for pallets 800 x 1200 lengthways (W x L)	Ast (mm)	6,465	6,470
4.35	Turning radius	Wa (mm)	4,160	4,160
4.36	Internal turning radius	b13 (mm)	1,516	1,516
Performance data				
5.1	Travel speed, unloaded	km/h	34.7	34.5
5.2	Lift speed, loaded / unloaded	m/s	0.44 / 0.51	0.43 / 0.51
5.3	Lowering speed, loaded / unloaded	m/s	0.51 / 0.46	0.51 / 0.46
5.6	Drawbar pull, loaded	N	102,264	103,441
5.8	Gradient performance, loaded / unloaded	%	38.2	34.6
5.10	Service brake	Hydraulic	Hydraulic	Hydraulic
Engine				
6.1	Engine manufacturer / type	Cummins QSB6.7	Cummins QSB6.7	Cummins QSB6.7
6.2	Engine power acc. to ISO 1585	kW	123	123
6.4	Rated speed	1/min	2,200	2,200
6.5	No. of cylinder / cubic capacity	/cm ³	6 / 6,700	6 / 6,700
Other details				
8.1	Type of drive control	Torque Convert 3 / 3	Torque Convert 3 / 3	Torque Convert 3 / 3
8.2	Operating pressure for attachments	bar	210	210
8.3	Oil volume	ℓ	135	135
8.4	Sound level at driver's ear according to DIN 12 053	db(A)	82	82
8.5	Tow coupling, type DIN	-	-	-



Notes

Lined area for taking notes, consisting of multiple horizontal dotted lines.

Notes

[illegible]

Optional items

- **FORK (L x W x T)(mm)**

- 110D-7A

- 75 x 200 x 1,200 / 75 x 200 x 1,500 / 75 x 200 x 1,650 / 75 x 200 x 1,800 / 75 x 200 x 2,100 / 85 x 200 x 2,440 / 85 x 200 x 2,600

- 130D-7A

- 85 x 200 x 1,200 / 85 x 200 x 1,500 / 85 x 200 x 1,650 / 85 x 200 x 1,800 / 85 x 200 x 2,100 / 90 x 200 x 2,440 / 90 x 200 x 2,600

- 160D-7A

- 90 x 200 x 1,200 / 90 x 200 x 1,500 / 90 x 200 x 1,650 / 95 x 200 x 1,800 / 95 x 200 x 2,100 / 95 x 200 x 2,440 / 100 x 200 x 2,600

- **MAST** : Duplex mast with free lift (160D-7A)/Triplex mast

- **MCV** : 4 - SPOOL / 5 - SPOOL

- **SEAT** : NON HEAT / HEAT , AIR SUSPENSION with HEAT

- **BEACON LAMP** : AMBER

- **FORK POSITIONER** : $\varnothing 82$ / $\varnothing 100$

- **INTEGRAL SIDE SHIFT**

- **INTEGRAL SIDE SHIFT + FORK POSITIONER**

- **TERMINAL WEST SYSTEM (160D-7A)**

- **HYDRAULIC LINE** : 3 - SPOOL / 4 - SPOOL / 5 - SPOOL

- **TIRE** : PNEUMATIC / SOLID

- **WIDE CARRIAGE (2,730 mm) (160D-7A)**

* Standard and optional equipment may vary per country. Contact your Hyundai dealer for more information.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT

